



Technical information

What size is the consumer's hitch?

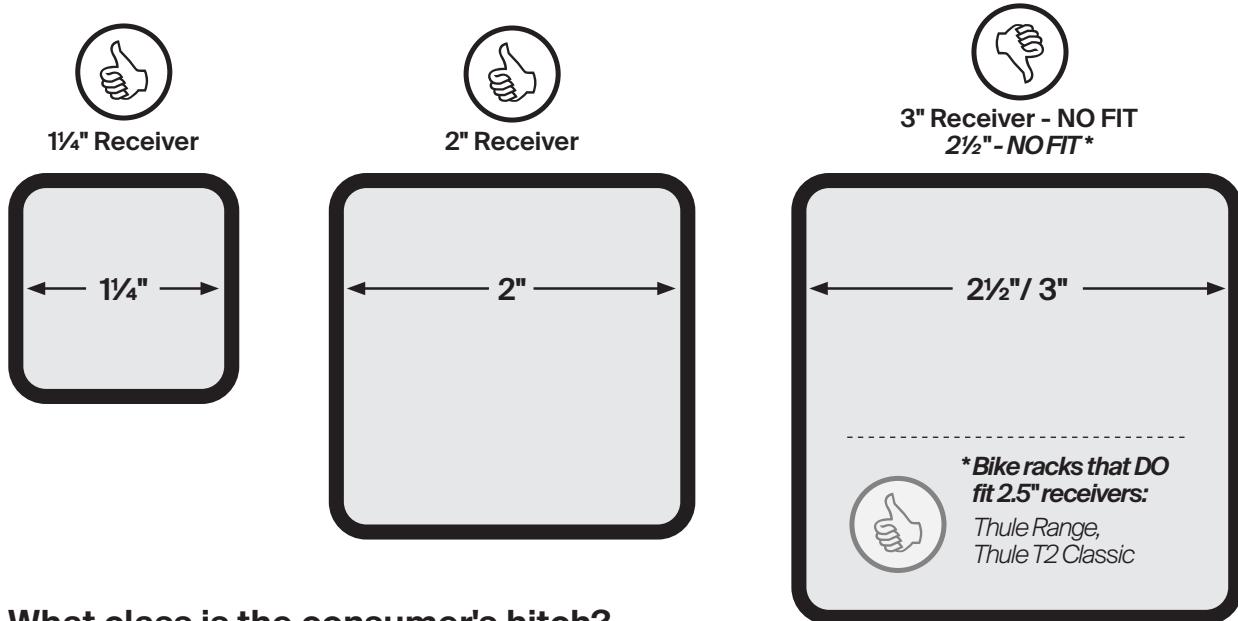


What class is the consumer's hitch?

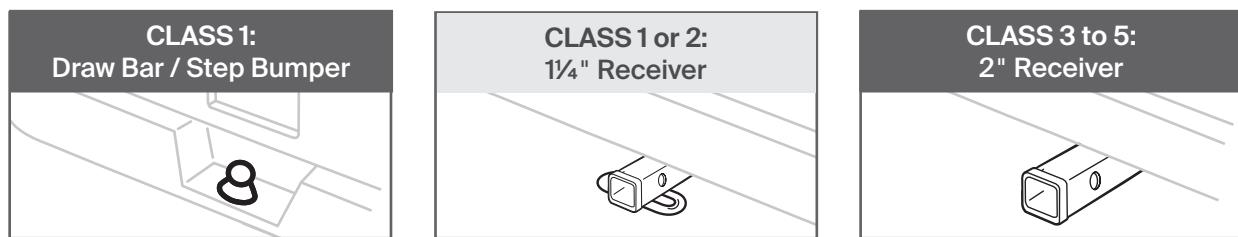

Consumer's hitch pin hole depth?



All Thule hitch racks
approved for use.



See chart to confirm if Thule
hitch rack is approved for use.

Hitch Rack	Pin Hole Depth Requirement
Apex XT Swing	
9027XT	1.5"
Helium Pro	
9042Pro	1.5"
9043Pro	1.5"
Apex XT	
9024XT	1.5"
9025XT	1.5"
9026XT	1.5"
Camber	
9056/9058	1.5"
Range	
9057	1.5"
ReVert	
9024500 (4B_2")	1.5"
9026500 (6B_2")	1.5"

PLATFORM	Hitch Rack	Pin Hole Depth Requirement
	Vero	
	9012600	1.5"
	T2 Pro XT/XTR	
	9034XT / 9034XTR	1.125"
	9035XT / 9035XTR	1.5"
	9034XT/XTR + 9036XT	1.5"
	Verse	
	903452	1.5"
	903453	1.5"
	903452 + 903651	1.5"
	Epos	
	903210 / 903211	1.5"
	903310	1.5"
	Helium Platform XT	
	903901/904011	1.5"
	T2 Pro X	
	904450	1.125"
	904550	1.5"
	904450 + 904650	1.5"
	T1	
	9041	1.5"
	Doubletrack Pro XT	
	905402	1.5"
	EasyFold XT	
	903202	1.5"
	OutPace	
	9012500	1.5"
	9013500	1.5"



Consumer's hitch receiver depth?

To ensure proper fit, it's important to know the depth of your receiver.

Determine this by doing the following:

- With a ruler inserted in the receiver, measure from the center of the hitch mounting hole to the point where you make contact with an obstacle. **This is your receiver depth.**
- If you do not contact a back-stop or your hitch receiver does not have a backstop, another potential point of contact could be an undercarriage-mounted spare tire or the undercarriage itself.
- Using the table in the next page, compare your measurement to see which hitch racks will work with your vehicle.

Your receiver depth must be equal to or greater than the product measurement listed in the table for a proper fit.

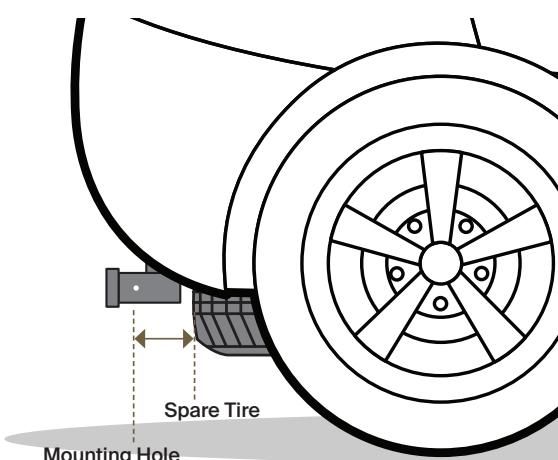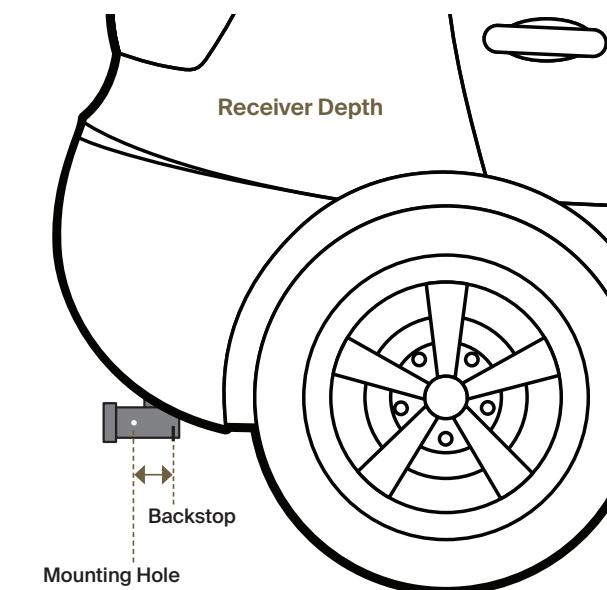


	Hitch Rack	Receiver Depth
PLATFORM	Vero 9012600	2.55"
	EasyFold XT 903202	1.4"
Hanging	Helium Platform XT 903901 904011	2.3" 2.3"
	T2 Pro XT/XTR 9034XT/9034XTR 9035XT/9035XTR 9034XT/XTR + 9036XT	2.5" 1.4" 2.5"
	Verse 903452 903453 903452 + 903651	2.55" 1.9" 2.55"
	T2 Pro X 904450 904550 904450 + 904650	2.5" 1.4" 2.5"
Hanging	Epos 903210 / 903211 903310	2" 2"
	T1 9041	1.5"
Hanging	DoubleTrack Pro XT 905402	1.5"
	OutPace 9012500 9013500	2" 2"
Hanging	Apex XT Swing 9027XT	2.5"
	Helium Pro 9042PRO, 9043PRO	1.4"
Hanging	Apex XT 9024XT 9025XT 9026XT	1.4" 1.4" 1.4"
	Camber 9058/9056	1.5"
	Range 9057	2.4"
Hanging	ReVert 9024500 (4B_2") 9026500 (6B_2")	2.55" 2.55"

Technical information

Consumer's hitch bumper clearance?

Make sure your bumper will not interfere with the Thule hitch rack. Measure the distance from the center of the mounting hole on your hitch to the end of your bumper. *This is your bumper clearance.*

Your bumper clearance must be equal to or less than the product measurement listed in the table for a proper fit.

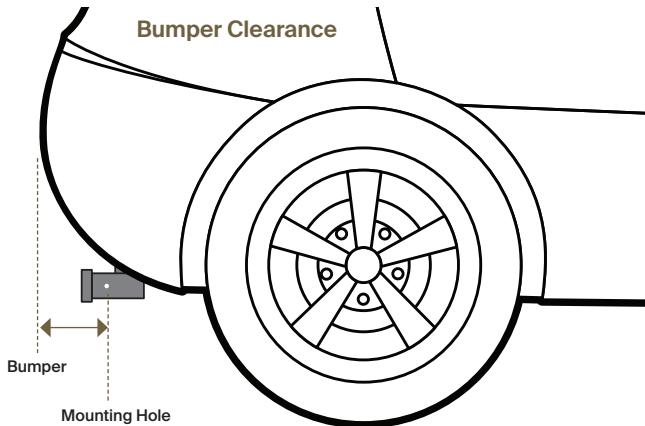

PLATFORM	Hitch Rack	Stowed Spare Tire Clearance	In-Use Spare Tire Clearance
	Vero		
	9012600	8.0"	18.7"
	EasyFold XT		
	903202	12.0"	12.0"
	T2 Pro XT/XTR		
	9034XT/9034XTR	6.3"	20.5"
	9035XT/9035XTR	6.3"	20.5"
	9034XT/XTR + 9036XT	6.3"	20.5"
	Verse		
	903452	8.0"	18.7"
	903453	8.0"	18.7"
	903452 + 903651	8.0"	18.7"
	Helium Platform XT		
	903901	N/A	11.0"
	904011	N/A	11.0"
	T2 Pro X		
	904450	6.3"	20.5"
	904550	6.3"	20.5"
	904450 + 904650	6.3"	20.5"
	Epos		
	903210 / 903211	N/A	9.5"
	903310	N/A	9.5"
	T1		
	9041	6.0"	19.3"
	DoubleTrack Pro XT		
	9054/905402	6.0"	6.0"
	OutPace		
	9012500	4.3"	9.4"
	9013500	4.3"	9.4"
	Apex XT Swing		
	9027XT	8.8"	8.8"
	Helium Pro		
	9042Pro/9043Pro	13.3"	13.3"
	Apex XT		
	9024XT	10.3"	10.3"
	9025XT	10.3"	10.3"
	9026XT	10.3"	10.3"
	Camber		
	9058/9056	7.3"	7.3"
	Range		
	9057	6.9"	6.9"
	ReVert		
	9024500 (4B_2")	12.9"	N/A
	9026500 (6B_2")	12.9"	N/A


PLATFORM	Hitch Rack	Bumper Clearance
	Vero	10.5"
	9012600	10.5"
	EasyFold XT	9.5"
	903202	9.5"
	T2 Pro XT/XTR	
	9034XT/9034XTR	6.3"
	9035XT/9035XTR	6.3"
	9034XT/XTR + 9036XT	6.3"
	Verse	
	903452	10.5"
	903453	10.5"
	903452 + 903651	10.5"
	Helium Platform XT	
	903901	3"
	904011	3"
	T2 Pro X	
	904450	6.3"
	904550	6.3"
	904450 + 904650	6.3"
	Epos	
	903210 / 903211	6.3"
	903310	6.3"
	T1	
	9041	6.5"
	DoubleTrack Pro XT	
	9054/905402	6.0"
	OutPace	
	9012500	6.5"
	9013500	6.5"
	Apex XT Swing	
	9027XT	7.3"
	Helium Pro	
	9042Pro/9043Pro	10.8"
	Apex XT	
	9024XT	7.0"
	9025XT	7.0"
	9026XT	7.0"
	Camber	
	9058/9056	5.3"
	Range	
	9057	5.4"
	ReVert	
	9024500 (4B_2")	12.9"
	9026500 (6B_2")	12.9"

Consumer's spare tire clearance?

If you have a spare tire on the back of your vehicle it may interfere with the installation of your Thule hitch rack. Measure the distance from the center of the mounting hole on your hitch receiver to the end of your spare tire.

This is your spare tire clearance.

Your spare tire clearance must be equal to or less than the product measurement listed in the table for a proper fit.

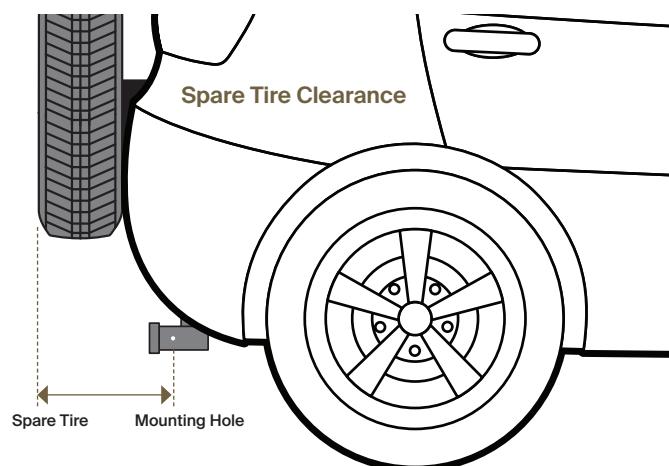


Technical information


Consumer's garage clearance?

If you will be parking your vehicle in a garage with the rack mounted, you can use these measurements to help you determine if there will be any interference issues with fitting your vehicle into your garage space with the rack in the stowed position or deployed position.

Garage Clearance – Platform Models

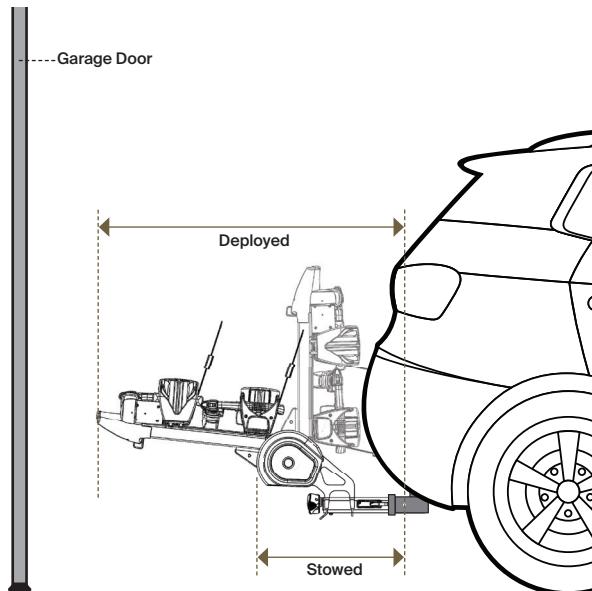

Garage Clearance – Swing & Tilt Models

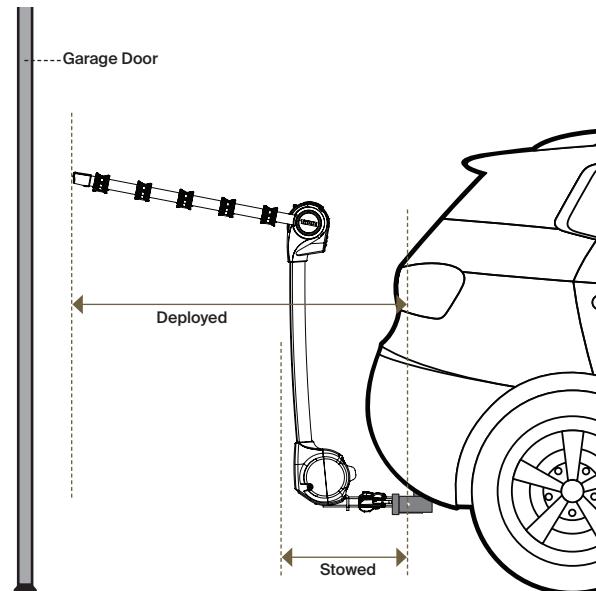

	<i>Hitch Rack</i>	<i>Stowed Clearance</i>	<i>Deployed Clearance</i>
PLATFORM			
Vero			
9012600	21.6"	42.7"	
T2 Pro XT/XTR			
9034XT/9034XTR	20.5"	41.5"	
9035XT/9035XTR	20.5"	41.5"	
9034XT/XTR + 9036XT	20.5"	60.1"	
Verse			
903452	21.6"	42.7"	
903453	21.6"	42.7"	
903452 + 903651	21.6"	65.2"	
T1			
9041	14.3"	28.5"	
T2 Pro X			
904450	20.5"	41.5"	
904550	20.5"	41.5"	
904450 + 904650	20.5"	60.1"	
Epos			
903210 / 903211	N/A	33.7"	
903310	N/A	43.5"	
DoubleTrack Pro XT			
9054/905402	14.5"	33"	
Helium Platform XT			
903901	13.5"	20.8"	
904011	13.5"	30.7"	
EasyFold XT			
903202	32"	32"	
OutPace			
9012500	13.2"	30.3"	
9013500	13.2"	39"	


	<i>Hitch Rack</i>	<i>Stowed Clearance</i>	<i>Deployed Clearance</i>
HANGING			
Helium Pro			
9042PRO	20.7"	32.0"	
9043PRO	21.9"	39.0"	
Apex XT			
9024XT	14.7"	28.2"	
9025XT	14.7"	38.1"	
9026XT	14.7"	42.1"	
Camber			
9058	14.8"	28.3"	
9056	14.8"	42.2"	
Range			
9057	14.4"	42.0"	
Apex XT Swing			
9027XT	15.2"	42.2"	
ReVert			
9024500 (4B_2")	27.5"	N/A	
9026500 (6B_2")	27.5"	N/A	

Technical information

Hitch dimensions

Though we design our hitch-mounted bike carriers to be as universal as possible, all vehicles are designed differently. These diagrams have been designed to help you better understand the “room” our hitch-mounted bike racks need to function properly.


Tilt hitch racks

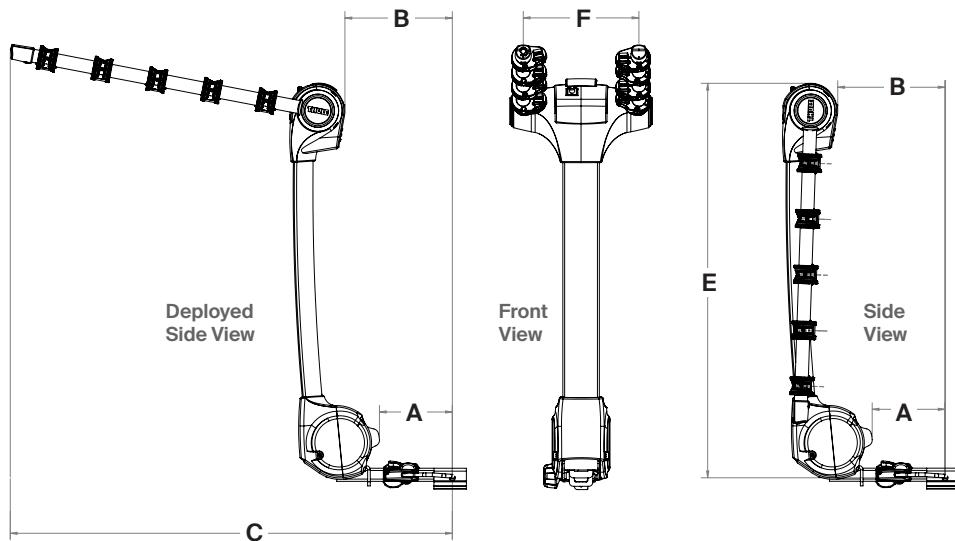

MODEL	A	B	C	D	E	F
9042PRO	10.8"	13.2"	32"	20.7"	37.3"	11"
9043PRO	10.8"	13.2"	39"	21.9"	37.3"	11"
9024XT	7"	9.3"	28.2"	15.4"	37"	11"
9025XT	7"	9.3"	42.1"	15.4"	37"	11"
9026XT	7"	9.3"	42.1"	15.4"	37"	11"

MODEL	A	B	C	D	E	F
9058	5.3"	6.7"	28.3"	14.8"	35.6"	11"
9056	5.3"	6.7"	42.2"	14.8"	35.6"	11"
9057	8.5"	6.3"	42.1"	14.8"	35.6"	11"

Swing away hitch racks


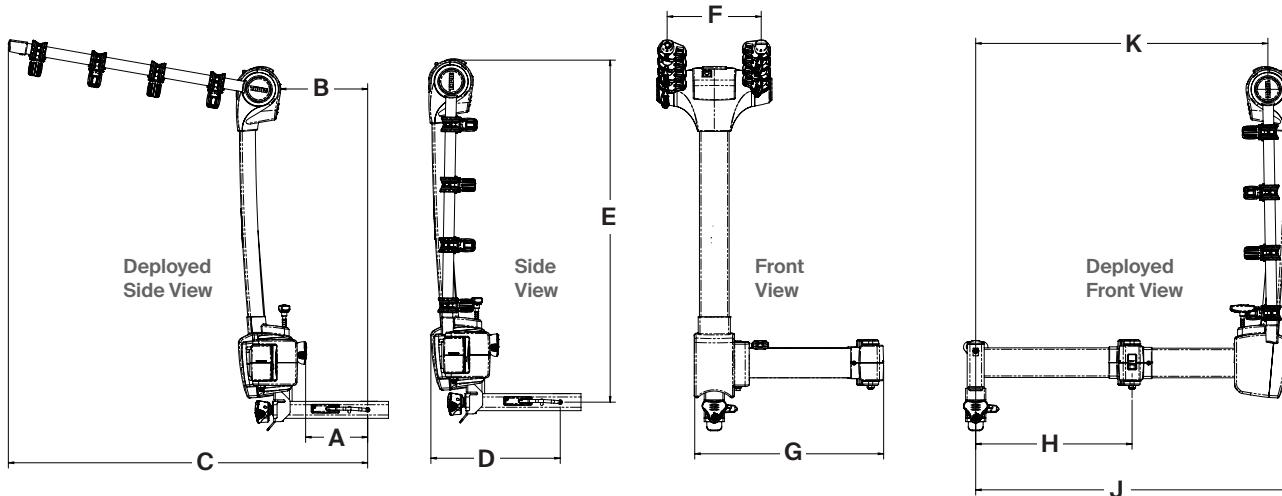


MODEL	A	B	C	D	E	F	G	H	J	K
9027XT	7.3"	10.3"	42.2"	15.2"	40.2"	11.1"	22.2"	18.4"	36.7"	34.3"

Technical information

Platform hitch racks

Deployed
Side View

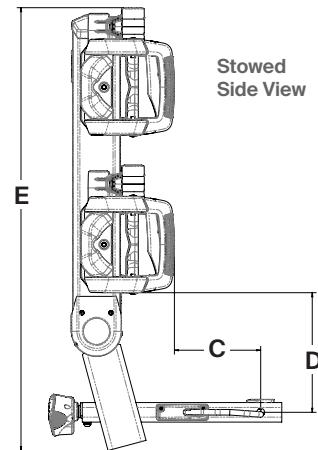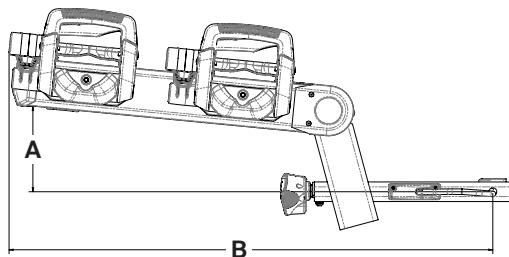


MODEL	A	B	C	D	E
903901	4.4"	21"	5.6"	8"	18.5"
904011	5"	31"	5.6"	8"	28"
903202	6"	32"	9.5"	N/A	32"
903452	3.35"	42.7"	8"	11.6"	34.5"
903453	3.35"	42.7"	8"	11.6"	34.5"
903452 + 903651	7.3"	65.1"	8"	11.6"	56.4"
903210	3.5"	33.7"	6.3"	N/A	N/A
903211	3.5"	33.7"	6.3"	N/A	N/A
903310	4.3"	43.5"	6.3"	N/A	N/A
9041	4.5"	28.5"	3.5"	15.3"	26.5"
9044	6.4"	35.3"	4.5"	8.9"	29.25"
9045	7.9"	34.3"	3.5"	10.4"	28"
9012600	3.35"	42.7"	8"	11.6"	34.5"

MODEL	A	B	C	D	E
9034XTR	7.6"	41.5"	6.25"	7.9"	33.8"
9035XTR	7.9"	41.5"	6.25"	7.9"	33.8"
9034XTR + 9036XTB	9.6"	60.1"	6.26"	7.9"	52.5"
904450	7.6"	41.5"	6.25"	7.9"	33.8"
904550	7.9"	41.5"	6.25"	7.9"	33.8"
904450 + 904650	9.6"	60.1"	6.26"	7.9"	52.5"
9044 + 9046	7.9"	55"	4.5"	8.9"	49"
9054	5"	33.9"	5.8"	14.25"	30.6"
9012500	12.2"	30.3"	4.3"	3.7"	29.2"
9013500	14.1"	39"	4.3"	3.7"	38.2"

Vertical hanging hitch racks


MODEL	A	B	C	D	E
9024500 (4B_2")	3.2"	27.5"	12.9"	13.1"	56.6"
9026500 (6B_2")	3.2"	27.5"	12.9"	13.1"	56.6"

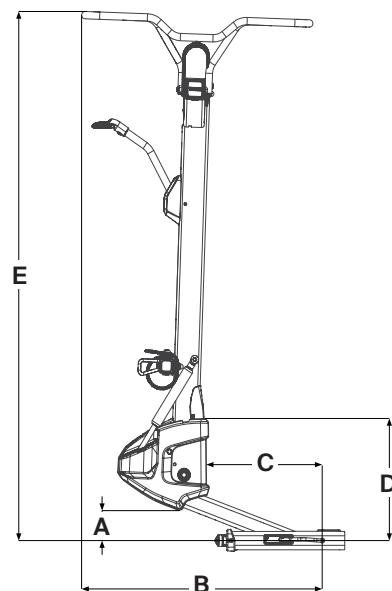

Technical information

Thule Santu with hitch bike rack measurements

To determine the clearance around Thule Santu (with Thule Epos or Thule EasyFold XT) and your vehicle, refer to the chart below.

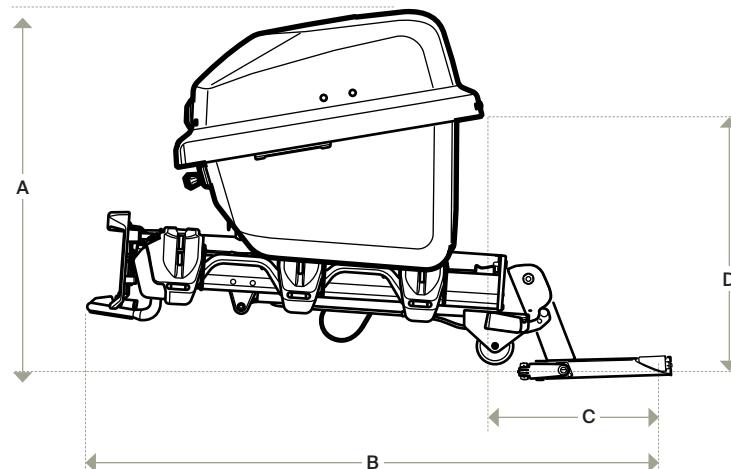


MODEL	A	B	C	D
909401 + 903210 (Epos 2 bike)	28.7" / 72.9 cm	33.7" / 85.5 cm	N/A*	N/A*
909401 + 903211 (Epos 2 bike)	28.7" / 72.9 cm	33.7" / 85.5 cm	N/A*	N/A*
909401 + 903310 (Epos 3 bike)	29.6" / 75.2 cm	43.5" / 110.5 cm	N/A*	N/A*
909401 + 903202 (EasyFold XT)	30.5" / 77.5 cm	32" / 81.2 cm	N/A*	N/A*

* carrier tilts down for trunk/hatch clearance

Thule Arcos hitch measurements

To determine the clearance around Thule Arcos and your vehicle, refer to the chart below.

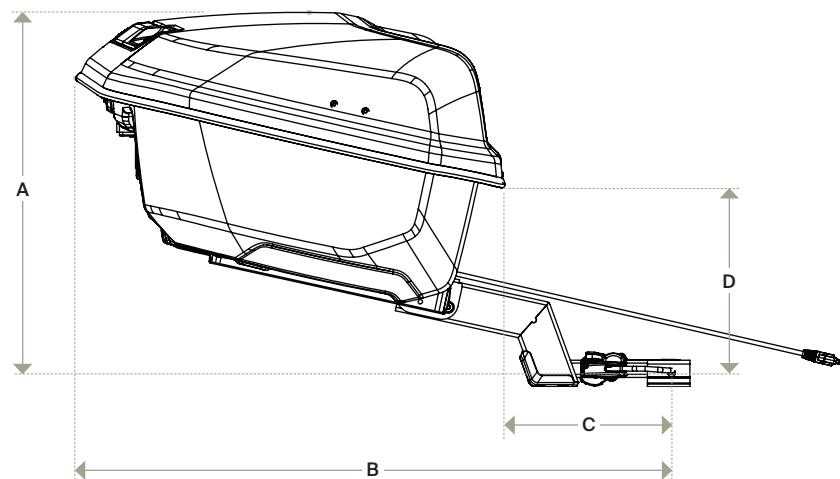

MODEL	A	B	C	D
906201 + 906301	26.1" / 66.3 cm	43.2" / 109.6 cm	12.2" / 31.2 cm	14.2" / 36 cm